

SP-301S SOLAR HELIPAD FATO LIGHT



FINAL APPROACH AND TAKE-OFF AREA

The S4GA Solar Final Approach and Take-Off Area helipad light is designed for temporary or permanent use at heliports, helipads, and landing zone areas of any type and size. It operates efficiently in all climate conditions and does not require connection to electrical infrastructure. Each light is powered by LiFePO4 batteries, offering high cycle life, a wide operating temperature range, and enhanced safety compared to conventional lithium-ion chemistries.

KEY FEATURES


- Self-Contained
- Solar-Powered
- Radio-Controlled
- Compliant with ICAO, FAA, EASA, CASA



TECHNICAL SPECIFICATIONS


Optics		Casing & Components	
<ul style="list-style-type: none"> • Color: white • 147 cd light output • Omnidirectional type • LED lifespan: 100.000 hrs • Maximum power consumption: 4.61 W • NVG-compatible, Infrared LEDs (optional) • User-replaceable 		<ul style="list-style-type: none"> • Light body materials Dome: borosilicate hardened glass, UV-resistant Casing: Lexan polycarbonate, UV-stabilized, color: aviation yellow • Mounting components Material: marine grade stainless steel Frangible coupling material: aluminum Type: permanent / quick release (optional) • Charging port: one port / two ports (optional) / drop-in charging port (optional) • Built-in antenna / external antenna (optional) • Pressure stabilizing valve, transportation fuse • Battery level indicator • Carrying handle • Casing lifespan: 15 years • Dimensions (LxWxH): 350 mm x 236 mm x 242 mm 	
Battery		Environmental Conditions	
LiFePO4	2x built-in batteries, user-replaceable, air transportable Autonomy: 27 hrs (30% intensity) Total capacity: 54 Wh (2 x 4,5 Ah / 6 V) LiFePO4, 6 V / 4,5 Ah Lifespan: 3,000 cycles (designed for 6-7 years)	<ul style="list-style-type: none"> • Temperature range: -20 to 50 °C (-4 to 122 °F) Optional: -40 to 80 °C (-40 to 176 °F) • Ingress Protection: IP-68 • Impact Resistance: IK-10 • Jet Blast Resistance: 240 kph 	
Solar Power Supply		Compliance	
<ul style="list-style-type: none"> • 5 W solar panel • Monocrystalline type (optional: polycrystalline) • Lifespan: 15 years • MPPT-Temp / Built-in inverter 12-36 V / 2 A 		<ul style="list-style-type: none"> ICAO Annex 14, Volume II (Heliports), 5th Edition dated July 2020 FAA AC 150/5390-2D (Heliport Design) dated January 2023 ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 3.2.2 & clause 4.9.1 FAA AC 150/5345-50B dated September 2007, clause 3.2.2 ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 4.9 ICAO Annex 14, Volume I, 9th Edition dated July 2022, clause 5.3.1.3 FAA AC 150-5345-46E, clause 3.4.2.1 FAA AC 150/5220-23, clause 3.2 ICAO Annex 14, Volume I, 7th Edition dated July 2016, clauses 8.1.8-8.1.9 & clause 8.1.11 2014/53/EU RED Directive, clauses 3.1a, 3.1b, 3.2 2011/65/EU ROHS Directive, clause 4.1 	
Control & Monitoring		Photometric & Chromaticity	
Communication	Wireless mesh type network	Jet Blast Resistance	
Frequency	868 MHz (optional 915 MHz, 2.4 GHz)	Frangibility	
Wireless range	>10 km (relayed)	Secondary Power Supply	
Operating modes	Steady / Flashing / Dusk till dawn Visible / Infrared (optional) / Visible + Infrared (optional)	CE Declaration of Conformity	
Activation options	Via UR-101 Handheld Controller Via UR-201 Control & Monitoring Unit (optional) Via ALCMS Computer Interface (requires UR-201; optional)		
Safety & Reliability			
<ul style="list-style-type: none"> • Five levels of protection against system failure • Secondary power supply: backup battery • Real-time monitoring via ALCMS (optional) • Emergency ON/OFF button 			

TECHNICAL DRAWING

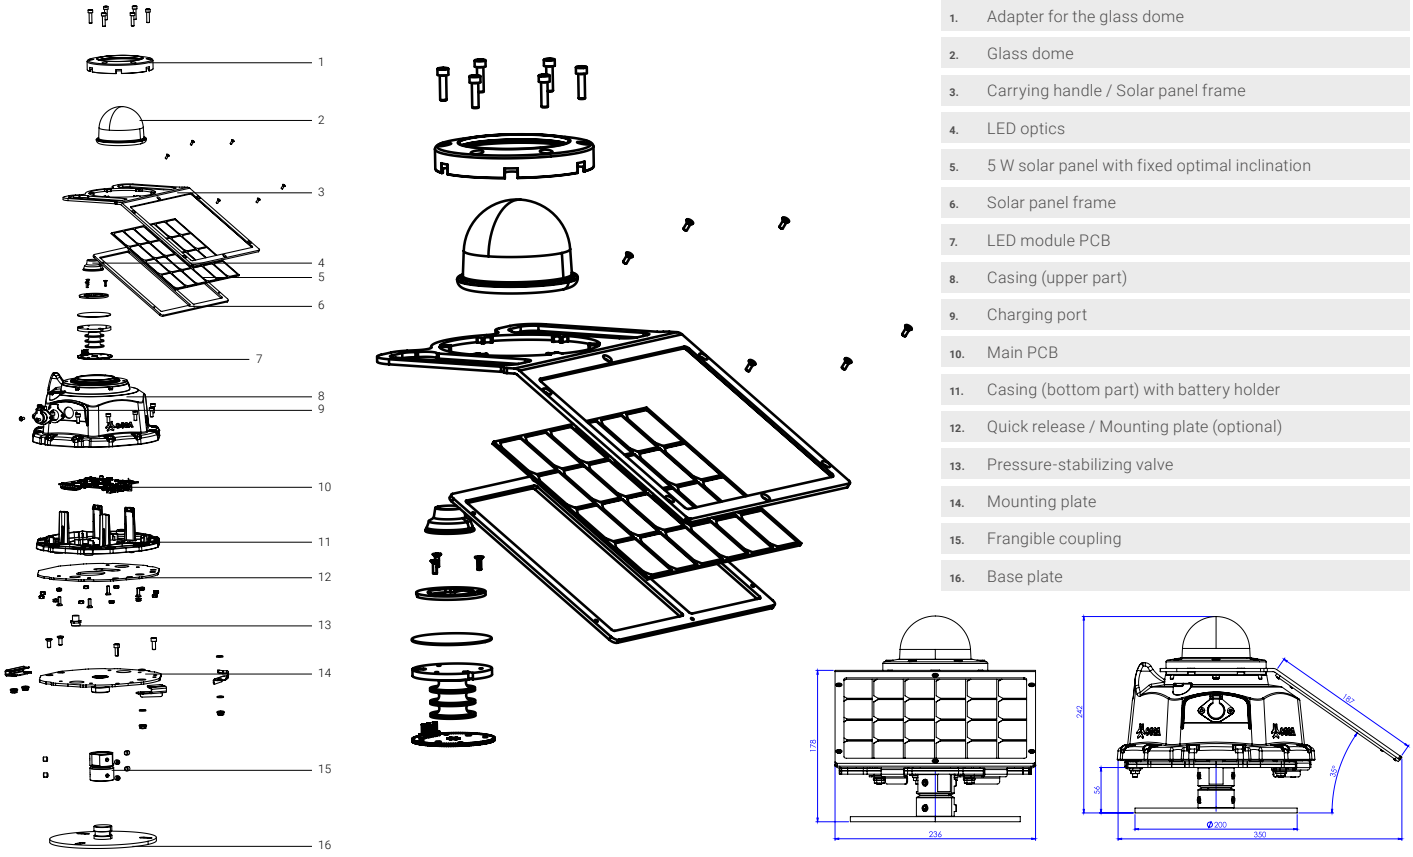

- 1. Adapter for the glass dome
- 2. Glass dome
- 3. Carrying handle / Solar panel frame
- 4. LED optics
- 5. 5 W solar panel with fixed optimal inclination
- 6. Solar panel frame
- 7. LED module PCB
- 8. Casing (upper part)
- 9. Charging port
- 10. Main PCB
- 11. Casing (bottom part) with battery holder
- 12. Quick release / Mounting plate (optional)
- 13. Pressure-stabilizing valve
- 14. Mounting plate
- 15. Frangible coupling
- 16. Base plate

PHOTOMETRIC PERFORMANCE

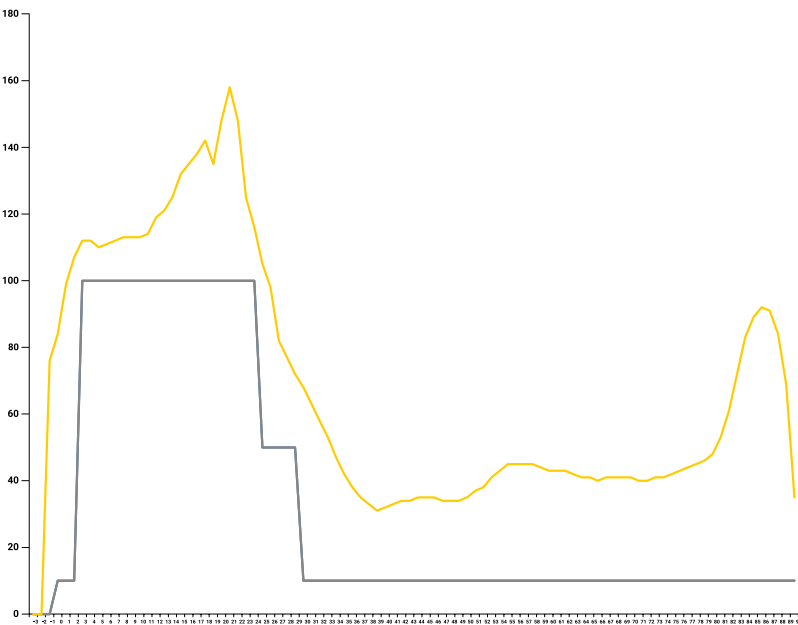

— S4GA average performance
 — Required by ICAO

SHIPPING DATA

Item	Dimensions of Package (LxWxH)	Gross Weight
SP-301 Lighting Unit with solar panel (NO batteries)	380 mm x 260 mm x 245 mm	3,88 kg
SP-301 Lighting Unit with solar panel (LiFePO4 batteries)	380 mm x 260 mm x 245 mm	4,58 kg

Document version: 11006-DS-0326