

SP-301S SOLAR OBSTRUCTION LIGHT TYPE A, LOW INTENSITY



The S4GA solar aviation obstruction light (ICAO-unserviceable area light) is designed for temporary or permanent use at airports of any type and size. It operates efficiently in all climate conditions and does not require connection to electrical infrastructure.



KEY FEATURES


- Self-Contained
- Solar-Powered
- Radio-Controlled
- Compliant with ICAO, FAA, EASA, CASA



TECHNICAL SPECIFICATIONS

Optics		Casing & Components											
<ul style="list-style-type: none"> • Color: red • 21 cd light output • Omnidirectional type • LED lifespan: 100.000 hrs • Maximum power consumption: 0.6 W • NVG-compatible, Infrared LEDs (optional) • User-replaceable 		<ul style="list-style-type: none"> • Light body materials Dome: borosilicate hardened glass, UV-resistant Casing: Lexan polycarbonate, UV-stabilized, color: aviation yellow • Mounting components Material: marine grade stainless steel Frangible coupling material: aluminum Type: permanent / quick release (optional) • Charging port: one port / two ports (optional) / drop-in charging port (optional) • Built-in antenna / external antenna (optional) • Pressure stabilizing valve, transportation fuse • Battery level indicator • Carrying handle • Casing lifespan: 15 years • Dimensions (LxWxH): 350 mm x 236 mm x 242 mm 											
Battery		Environmental Conditions											
LiFePO4	2x built-in batteries, user-replaceable, air transportable Autonomy: 210 hrs (30% intensity) Total capacity: 54 Wh (2 x 4,5 Ah / 6 V) LiFePO4, 6 V / 4,5 Ah Lifespan: 3,000 cycles (designed for 6-7 years)	<ul style="list-style-type: none"> • Temperature range: -20 to 50 °C (-4 to 122 °F) Optional: -40 to 80 °C (-40 to 176 °F) • Ingress Protection: IP-68 • Impact Resistance: IK-10 • Jet Blast Resistance: 240 kph 											
Solar Power Supply		Compliance											
<ul style="list-style-type: none"> • 5 W solar panel • Monocrystalline type (optional: polycrystalline) • Lifespan: 15 years • MPPT-Temp / Built-in inverter 12-36 V / 2 A 		<table border="1"> <tr> <td>Photometric & Chromaticity</td> <td>ICAO Annex 14, Volume I, 9th Edition dated July 2022, table 6-2, Appendix 1, Figure A1-1b</td> </tr> <tr> <td>Jet Blast Resistance</td> <td>ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 3.2.2 & clause 4.9.1 FAA AC 150/5345-50B dated September 2007, clause 3.2.2</td> </tr> <tr> <td>Frangibility</td> <td>ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 4.9 ICAO Annex 14, Volume I, 9th Edition dated July 2022, clause 5.3.1.3 FAA AC 150-5345-46E, clause 3.4.2.1 FAA AC 150/5220-23, clause 3.2</td> </tr> <tr> <td>Secondary Power Supply</td> <td>ICAO Annex 14, Volume I, 7th Edition dated July 2016, clauses 8.1.8-8.1.9 & clause 8.1.11</td> </tr> <tr> <td>CE Declaration of Conformity</td> <td>2014/53/EU RED Directive, clauses 3.1a, 3.1b, 3.2 2011/65/EU ROHS Directive, clause 4.1</td> </tr> </table>		Photometric & Chromaticity	ICAO Annex 14, Volume I, 9th Edition dated July 2022, table 6-2, Appendix 1, Figure A1-1b	Jet Blast Resistance	ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 3.2.2 & clause 4.9.1 FAA AC 150/5345-50B dated September 2007, clause 3.2.2	Frangibility	ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 4.9 ICAO Annex 14, Volume I, 9th Edition dated July 2022, clause 5.3.1.3 FAA AC 150-5345-46E, clause 3.4.2.1 FAA AC 150/5220-23, clause 3.2	Secondary Power Supply	ICAO Annex 14, Volume I, 7th Edition dated July 2016, clauses 8.1.8-8.1.9 & clause 8.1.11	CE Declaration of Conformity	2014/53/EU RED Directive, clauses 3.1a, 3.1b, 3.2 2011/65/EU ROHS Directive, clause 4.1
Photometric & Chromaticity	ICAO Annex 14, Volume I, 9th Edition dated July 2022, table 6-2, Appendix 1, Figure A1-1b												
Jet Blast Resistance	ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 3.2.2 & clause 4.9.1 FAA AC 150/5345-50B dated September 2007, clause 3.2.2												
Frangibility	ICAO Doc 9157 AN901 Aerodrome Design Manual Part 6, 1st Edition dated 2006, clause 4.9 ICAO Annex 14, Volume I, 9th Edition dated July 2022, clause 5.3.1.3 FAA AC 150-5345-46E, clause 3.4.2.1 FAA AC 150/5220-23, clause 3.2												
Secondary Power Supply	ICAO Annex 14, Volume I, 7th Edition dated July 2016, clauses 8.1.8-8.1.9 & clause 8.1.11												
CE Declaration of Conformity	2014/53/EU RED Directive, clauses 3.1a, 3.1b, 3.2 2011/65/EU ROHS Directive, clause 4.1												
Control & Monitoring													
Communication	Wireless mesh type network												
Frequency	868 MHz (optional 915 MHz, 2.4 GHz)												
Wireless range	>10 km (relayed)												
Operating modes	Steady / Flashing / Dusk till dawn Visible / Infrared (optional) / Visible + Infrared (optional)												
Activation options	Via UR-101 Handheld Controller Via UR-201 Control & Monitoring Unit (optional) Via ALCMS Computer Interface (requires UR-201; optional)												
Safety & Reliability													
<ul style="list-style-type: none"> • Five levels of protection against system failure • Secondary power supply: backup battery • Real-time monitoring via ALCMS (optional) • Emergency ON/OFF button 													

TECHNICAL DRAWING

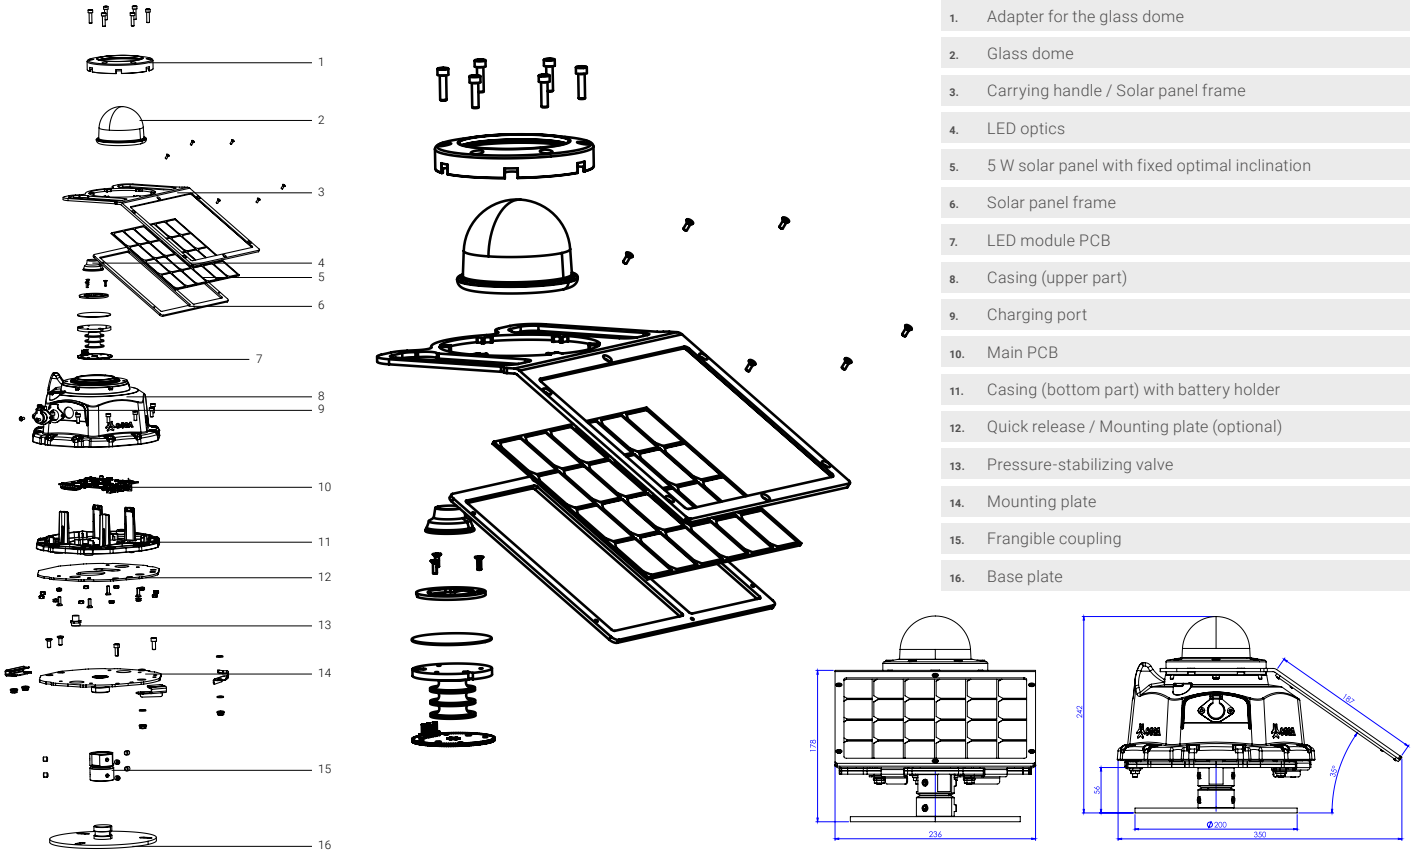

PHOTOMETRIC PERFORMANCE



SHIPPING DATA

Item	Dimensions of Package (LxWxH)	Gross Weight
SP-301 Lighting Unit with solar panel (NO batteries)	380 mm x 260 mm x 245 mm	3,88 kg
SP-301 Lighting Unit with solar panel (LiFePO4 batteries)	380 mm x 260 mm x 245 mm	4,58 kg

Document version: 11008-DS-0326